



Syvecs Limited

Syvecs S6Plus

Pinouts and Wiring Info

Support Team  
03-02-2018


This document intended for use by a technical audience and describes a number of procedures that are potentially hazardous. Installations should be carried out by competent persons only.

Syvecs and the author accept no liability for any damage caused by the incorrect installation or configuration of the equipment.

Please Note that due to frequent firmware changes certain windows might not be the same as the manual illustrates. If so please contact the Syvecs Tech Team for Assistance.

[Support@Syvecs.co.uk](mailto:Support@Syvecs.co.uk)

## Syvecs S6Plus Pinouts

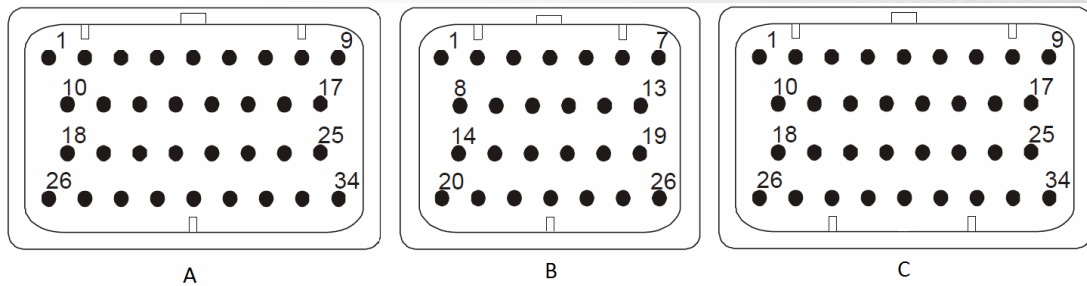

A	DESCRIPTION	CONNECTOR A	
	PART NUMBER	4-1437290-0	
	NOTES:	34 Way - Key1	

Syvecs Description	S6+ Pinout	Function	Notes
PWR CTR OUT	A1	MAIN RELAY OUTPUT	PULLS TO GROUND AS DEFAULT WHEN ACTIVED VIA MAIN RELAY SWITCH C28
H-Bridge1 / SlaveOut1	A2	H-Bridge1	H-BRIDGE OUTPUTS, CAN BE DRIVEN HIGH OR LOW. USED GENERALLY FOR MOTOR CONTROL, PWM OUTPUT, VANOS .....
H-Bridge2 / SlaveOut2	A3	H-Bridge2	
H-Bridge3 / SlaveOut3	A4	H-Bridge3	
H-Bridge4 / SlaveOut4	A5	H-Bridge4	
H-Bridge5 / SlaveOut5	A6	H-Bridge5	
H-Bridge6 / SlaveOut6	A7	H-Bridge6	
H-Bridge7 / SlaveOut7	A8	H-Bridge7	
H-Bridge8 / SlaveOut8	A9	H-Bridge8	
FUEL1	A10	INJECTOR or PWM OUTPUT	FUEL INJECTOR OUTPUTS CAPABLE OF HIGH IMPEDANCE INJECTORS ONLY OR USED AS OUTPUTS FOR DEVICES, SUPPORTS PWM AND CAN HANDLE 10AMP MAX
FUEL2	A11	INJECTOR or PWM OUTPUT	
FUEL3	A12	INJECTOR or PWM OUTPUT	
FUEL4	A13	INJECTOR or PWM OUTPUT	
FUEL5	A14	INJECTOR or PWM OUTPUT	
FUEL6	A15	INJECTOR or PWM OUTPUT	
FUEL7	A16	INJECTOR or PWM OUTPUT	
FUEL8	A17	INJECTOR or PWM OUTPUT	
FUEL9/PWM1	A18	INJECTOR or PWM OUTPUT	FUEL/ PWM OUTPUTS CAPABLE OF UP TO 10AMPS MAX, HAVE OPTION VIA HARDWARE JUMPER TO APPLY 12V PULLUP USED FOR SOME TACHOS
FUEL10/PWM2	A19	INJECTOR or PWM OUTPUT	
FUEL11/PWM3	A20	INJECTOR or PWM OUTPUT	FUEL/ PWM OUTPUTS CAPABLE OF UP TO 10AMPS MAX, HAVE OPTION VIA HARDWARE JUMPER TO APPLY 5V PULLUP USED FOR OEM FUEL PUMP CONTROLLERS
FUEL12/PWM4	A21	INJECTOR or PWM OUTPUT	
FUEL13/PWM5	A22	INJECTOR or PWM OUTPUT	FUEL/ PWM OUTPUTS CAPABLE OF UP TO 10AMPS MAX, HAVE OPTION VIA HARDWARE JUMPER TO FLYBACK DIODE, WISE TO USE WITH VARIABLE VALVE SOLENOIDS
FUEL14/PWM6	A23	INJECTOR or PWM OUTPUT	
FUEL15/PWM7	A24	INJECTOR or PWM OUTPUT	
FUEL16/PWM8	A25	INJECTOR or PWM OUTPUT	
IGN1	A26	CYL 1 IGNITION OUTPUT	TTL 5V IGNITION OUTPUTS
IGN2	A27	CYL 2 IGNITION OUTPUT	TTL 5V IGNITION OUTPUTS
IGN3	A28	CYL 3 IGNITION OUTPUT	TTL 5V IGNITION OUTPUTS
IGN4	A29	CYL 4 IGNITION OUTPUT	TTL 5V IGNITION OUTPUTS
IGN5	A30	CYL 5 IGNITION OUTPUT	TTL 5V IGNITION OUTPUTS
IGN6	A31	CYL 6 IGNITION OUTPUT	TTL 5V IGNITION OUTPUTS
PWRGND	A32	POWER GROUND	LINKED POWER GROUND
PWRGND	A33	POWER GROUND	LINKED POWER GROUND
PWRGND	A34	POWER GROUND	LINKED POWER GROUND

<b>B</b>	<b>DESCRIPTION</b>	CONNECTOR B	
	PART NUMBER	3-1437290-7	
	NOTES:	26 Way - Key1	
PWRGND	B1	POWER GROUND	LINKED POWER GROUND
EGT2 +	B2	K - TYPE THERMO	
EGT2 -	B3	K - TYPE THERMO	
KNOCK	B4	KNOCK	
KNOCK 2	B5	KNOCK2	
PVBAT	B6	CONSTANT 12V	CONSTANT 12V POWER SUPPLY - REQUIRED For Main Relay control, NOT REQUIRED if not using Main Relay Control
VBAT	B7	12v	12V SUPPLY, All IVBAT PINS ARE JOINED ON BOARD
LAM1A	B8	Lamv / LamD1+ / LamLun1	Set Appropriate Solder Bridge Settings (SB) for desired setup NTK/ DENSO / BOSCH LSU –  See Lambda Wiring – Page 17
LAM1B	B9	Lami / LamD1- /LamIP1	
LAM1C	B10	LamLIA1	
LAM1D	B11	LamGND / LamLVM1	
LAM1HEATER	B12	LAMBDA HEATER	Lambda Heater
VBAT	B13	12V	12V SUPPLY, All IVBAT PINS ARE JOINED ON BOARD
LAM2A	B14	Lamv / LamD1+ / LamLun1	Set Appropriate Solder Bridge Settings (SB) for desired setup NTK/ DENSO / BOSCH LSU –  See Lambda Wiring – Page 17
LAM2B	B15	Lami / LamD1- /LamIP1	
LAM2C	B16	LamLIA1	
LAM2D	B17	LamGND / LamLVM1	
LAM2HEATER	B18	LAMBDA HEATER	Lambda Heater
VBAT	B19	12V	12V SUPPLY, All IVBAT PINS ARE JOINED ON BOARD
KLINE	B20	Kline	KLINE INTERFACE FOR OBDII
RS232RX	B21	RS232RX	
RS232TX	B22	RS232TX	
LANRX-	B23	Cat5 Pin2	Orange/White
LANRX+	B24	Cat5 Pin1	White/Orange
LANTX-	B25	Cat5 Pin6	Green/White
LANTX+	B26	Cat5 Pin3	White/Green

C	DESCRIPTION	CONNECTOR C	
	PART NUMBER	4-1437290-1	
	NOTES:	34 Way - Key2	
KNOCK GROUNDS	C1	KNOCK GROUND	KNOCK GROUNDS
ANGND	C2	SENSOR GND	SENSOR GROUND CIRCUIT
ANGND	C3	SENSOR GND	SENSOR GROUND CIRCUIT
ANGND	C4	SENSOR GND	SENSOR GROUND CIRCUIT
5V OUT	C5	5V OUT	5V OUT CIRCUIT
5V OUT	C6	5V OUT	5V OUT CIRCUIT
5V OUT	C7	5V OUT	5V OUT CIRCUIT
CAN L	C8	Can Low	
CAN H	C9	Can High	
AN01	C10	BI-POLAR INPUTS	0-5V or SPEED, FREQUENCY INPUT - Pull Up Available in Software
AN02	C11	BI-POLAR INPUTS	0-5V or SPEED, FREQUENCY INPUT - Pull Up Available in Software
AN03	C12	BI-POLAR INPUTS	0-5V or SPEED, FREQUENCY INPUT - Pull Up Available in Software
AN04	C13	BI-POLAR INPUTS	0-5V or SPEED, FREQUENCY INPUT - Pull Up Available in Software
AN05	C14	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN06	C15	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN07	C16	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN08	C17	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN09	C18	VOLT-INPUTS	0-5V INPUT No Pull Up
AN10	C19	VOLT-INPUTS	0-5V INPUT No Pull Up
AN11	C20	VOLT-INPUTS	0-5V INPUT No Pull Up
AN12	C21	VOLT-INPUTS	0-5V INPUT No Pull Up
AN13	C22	RESISTIVE INPUTS	RESISTIVE 0-5V INPUTS WITH 5V PULLUP BUILT IN
AN14	C23	RESISTIVE INPUTS	RESISTIVE 0-5V INPUTS WITH 5V PULLUP BUILT IN
AN15	C24	RESISTIVE INPUTS	RESISTIVE 0-5V INPUTS WITH 5V PULLUP BUILT IN
AN16	C25	RESISTIVE INPUTS	RESISTIVE 0-5V INPUTS WITH 5V PULLUP BUILT IN
EGT1-	C26	EGT1 -	
EGT1+	C27	EGT1 +	
PWR CTR IN	C28	MAIN RELAY INPUT SW	MAIN RELAY CONTROL SWITCH, 12V SUPPLIED TO THIS PIN TURNS ON MAIN RELAY OUTPUT A1, PVBAT (B6) REQUIRES A 12V CONSTANT POWER ALSO FOR MAIN RELAY CONTROL TO WORK
AN S1 / Slave An01	C29	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN S2 / Slave An02	C30	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN S3 / Slave An03	C31	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN S4 / Slave An04	C32	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN S5 / Slave An05	C33	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software
AN S6 / Slave An06	C34	UNI-POLAR INPUTS	0-5V or FREQUENCY INPUT with Fixed Thresholds - Pull Up Available in Software

## General Connections

### Connecting Power

The ECU has three power feeds, which can either be used to provide a redundant multiple feeds, or as a way of providing switched power to additional loads through the loom.

#### Example Schematic

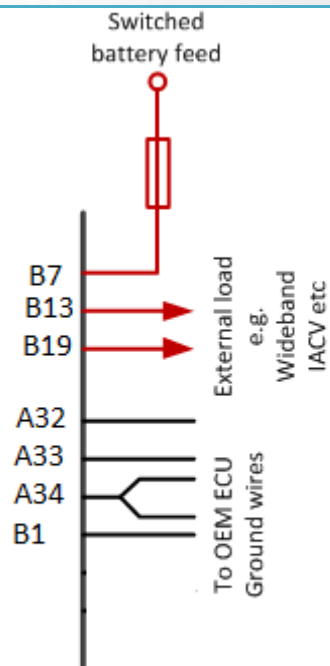


Figure 0-1 - Redundant Power Feeds and a Common grounding point.

### Pin Schedule

Pin Number	Function	Notes
B7	VBAT	Use a fused Switched feed.
B13	VBAT	Use a fused Switched feed.
B19	VBAT	Use a fused Switched feed.
B6	PVBAT	Constant Power - Used for Main Relay Control Only
A32	Power Ground	Up to 2 ground wires can be paired to this pin.
A33	Power Ground	Up to 2 ground wires can be connected to this pin.
A34	Power Ground	Up to 2 ground wires can be paired to this pin.
B1	Power Ground	Up to 2 ground wires can be paired to this pin.

**NOTE!** Power Grounds are designed to conduct High Current loads – Do not mix Power Grounds with Analogue (AN) Grounds.

## LAN Connection

Connection from the S6plus to a Laptop/PC uses a Male RJ45 plug, wired in cross over configuration.

### Example Schematic

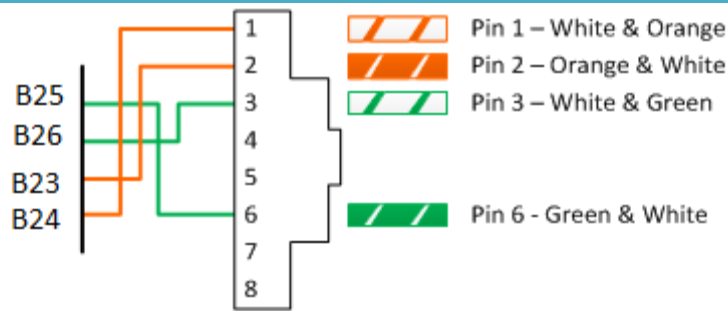


Figure 0-2 RJ45 Wiring


### Pin Schedule

Pin Number	Function	Notes
B25	LAN Transmit -	RJ45 Pin 6 – Green & White wire
B26	LAN Transmit +	RJ45 Pin 3 – White & Green wire
B23	LAN Receive -	RJ45 Pin 2 – Orange & White wire
B24	LAN Receive +	RJ45 Pin 1 – White & Orange wire

## CAN Bus

Common Area Network Bus (CAN Bus) is a widely used data interface common used in many cars and aftermarket accessories (such as Stack Data loggers and Dashes). Data is sent using the High and Low wires, which are maintained as a twisted pair.

### Example Schematic

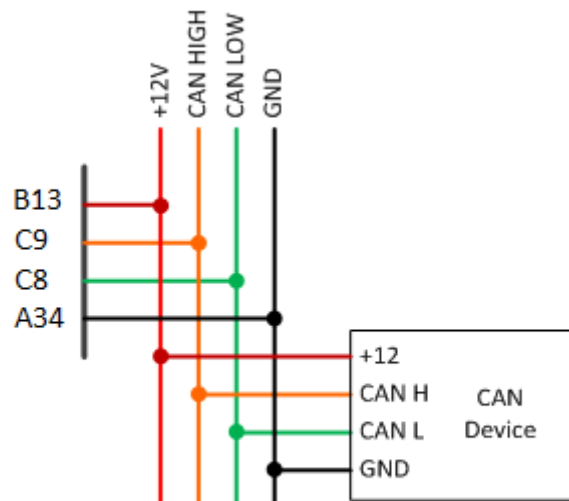

**NOTE:** CAN Wires must be kept as a twisted pair.

Pin Number	Function	Notes
C9	CAN HIGH	Check OEM Colour pairing.
C8	CAN LOW	Ensure wires are twisted pair.

## RS232

Telemetry can data can be provided via RS232.

### Example Schematic




Figure 0-3 RS232 Connection

### Pin Schedule

Pin Number	Function	Notes
B1	Pwr GND	DB-9 pin 5
B21	Rx	DB-9 pin 2
B22	Tx	DB-9 pin 3

## Input Connections

### Sensor/ Analogue Grounds (AN Grounds)

Sensors and miscellaneous analogue inputs have their own Ground pins; these grounds must be kept separate from the Power grounds shown in the first section. As there are four ground pins you may have to connect multiple grounds to some of the pins if you have more than four sensors.

### Pin Schedule


Pin Number	Function	Notes
C2	ANGND1	
C3	ANGND1	
C4	ANGND2	

## Assigning Inputs

The Syvecs S6GP has 24 programmable inputs available and although they are fully configurable in Scal, they are not all the same type of input which means sensors that for example require a pull up, have to assigned to different types..... Listed below are the 4 types which are available.

### Bipolar Inputs

These Inputs are able to swing above and below the reference ground meaning they can see Positive Voltage as well as Negative.

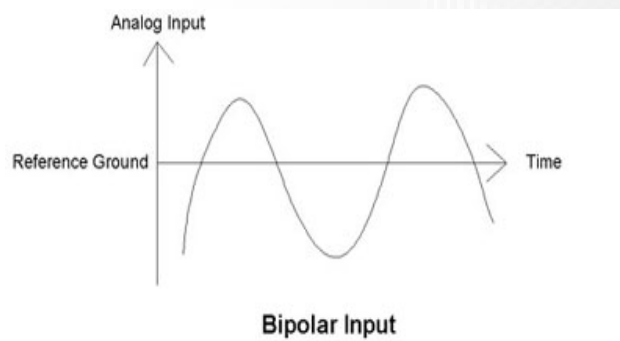

Example of sensors normally used on these Inputs are:

- Reluctor Crank and Cam Sensors
- ABS Sensors for wheel speed


Bipolar inputs are not just limited to the above they can also be used for any sensor that outputs 0-5volts. They are also able to provide a Pull-up through Scal

Pin Number	Scal Assignment	Notes
C10	An01	
C11	An02	
C12	An03	
C13	An04	



## Unipolar Inputs -

These Inputs are only able to swing above the reference ground meaning they can only see Positive Voltages. When used in Frequency based signals have fixed thresholds of 1.25vL and 3.75vH

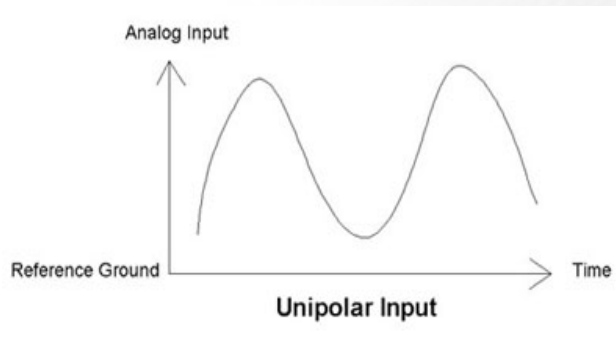

Example of sensors normally used on these Inputs are:

- Hall Effect Crank and Cam Sensors
- Gearbox speed sensors

Unipolar inputs are not just limited to the above they can also be used for any sensors which outputs 0-5volts. They are also able to provide a Pull-up through Scal.

Pin Number	Scal Assignment	Notes
C14	An05	
C15	An06	
C16	An07	
C17	An08	
C29	Slave An01	
C30	Slave An02	
C31	Slave An03	
C32	Slave An04	
C33	Slave An05	
C34	Slave An06	

## Voltage Inputs

These Inputs are able to sense a Voltage level which is linear and does not swing

Example of sensors normally used on these Inputs are:

- Manifold Pressure sensors
- Throttle Positions
- Oil Pressures

Voltage Inputs are not just limited to the above then can also be used for any sensor which outputs a 0-5volt signal but NOT able to provide a pull up.

Pin Number	Scal Assignment	Notes
C18	An09	
C19	An10	
C20	An11	
C21	An12	

## Resistive Inputs

These Inputs are the same as voltage inputs in which they can accept a 0-5v but they have a fixed 3.3k 5v Pull up fitted

.Example of Sensors normally used on these Inputs are:


- Temperature sensors
- Calibration switches

Pin Number	Scal Assignment	Notes
C22	An13	
C23	An14	
C24	An15	
C25	An16	

## Sensor Schematics - Examples

### Crank Sensor – Magnetic Type

#### Example Schematic

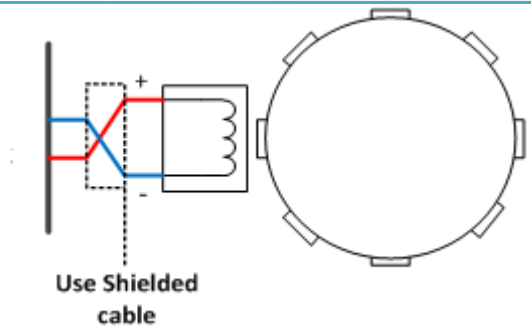


#### Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	Crank Sensor – (Shared with Cam Sensor)
C10, C11, C12, C13	Bipolar Input	Crank Sensor+

### Cam Sensors – Magnetic Type

#### Example Schematic




#### Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	Cam Sensor – (Shared with Crank Sensor)
C10, C11, C12, C13	Bipolar input	Cam Sensor +

# Manifold Pressure Sensor (MAP)

## Example Schematic

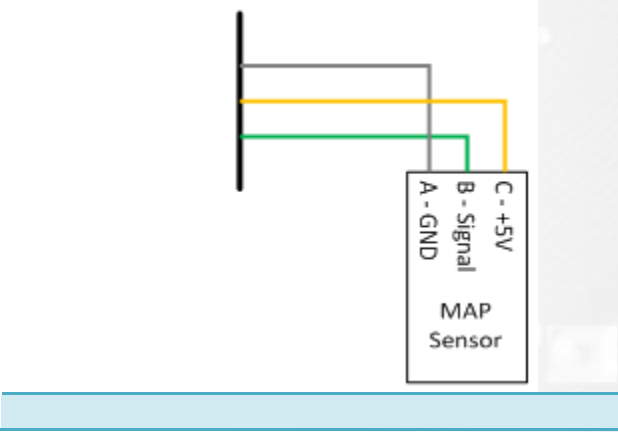


## Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	May be shared with multiple sensors
C5	5VOUT1	Regulated sensor power supply
C18	Voltage Input	Can use Bipolar, Unipolar or Voltage inputs

Throttle Position Sensor (TPS)

Example Schematic

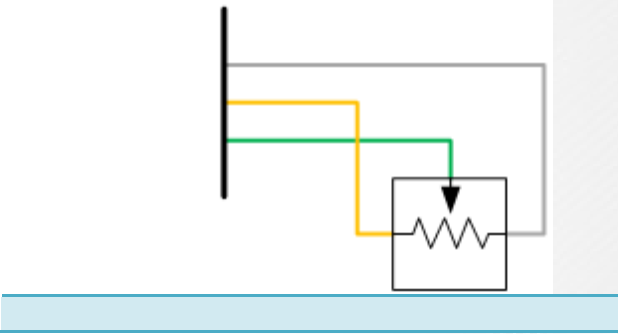


Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	May be shared with multiple sensors
C5	5VOUT1	Regulated sensor power supply
C19	Voltage Input	Can use Bipolar, Unipolar or Voltage inputs

Coolant Temperature Sensor (CTS)

Example Schematic

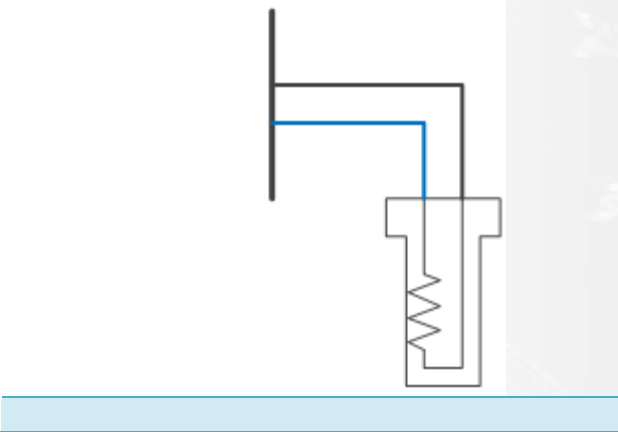


Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	May be shared with multiple sensors
C22	Resistive Input	Can use Resistive inputs #1 to #4 (pins 63 to 66)

### Inlet Air Temperature Sensor (IAT)

#### Example Schematic

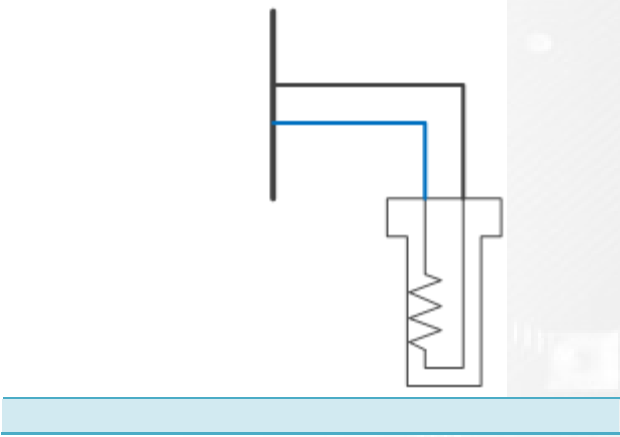


#### Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	May be shared with multiple sensors
C23	Resistive Input	Can use Resistive inputs #1 to #4 (pins 63 to 66)

### Calibration Switches

#### Example Schematic

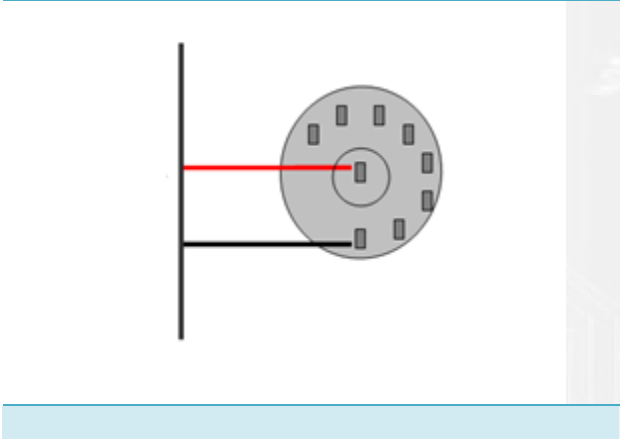


#### Pin Schedule

Pin Number	Function	Notes
C2	ANGND1	May be shared with multiple sensors
C24	AN15	Can use Resistive inputs #1 to #4 (pins 63 to 66) Cal Switches Require Pull Up to be On

## Narrowband Lambda Sensor

### Example Schematic

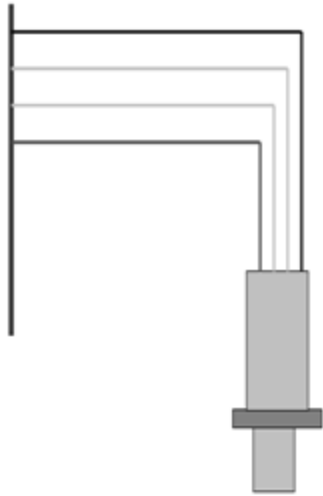

### Pin Schedule


Wire Colour	Function	Pins Usable on S6PLUS
White	Heater	C7, C13, C19
White	Heater Drive	Any FUEL Output – Needs to be assigned in Scal on I/O Configuration
Black	Signal Ground	A34
Grey	Lambda Signal	Can use Bipolar, Unipolar or Voltage inputs

## Wideband Lambda Sensor

The Syvecs S6Plus has the ability to drive a NTK Wideband, Bosch LSU 4.2/4.9 and Denso AF Sensor directly without the use of external units.

On the S6Plus Ecu you can drive 1 x NTK, 2 x Bosch LSU 4.2/4.9 Sensors and 2 x Denso 4 wire A/F Sensors.

### Example Schematic

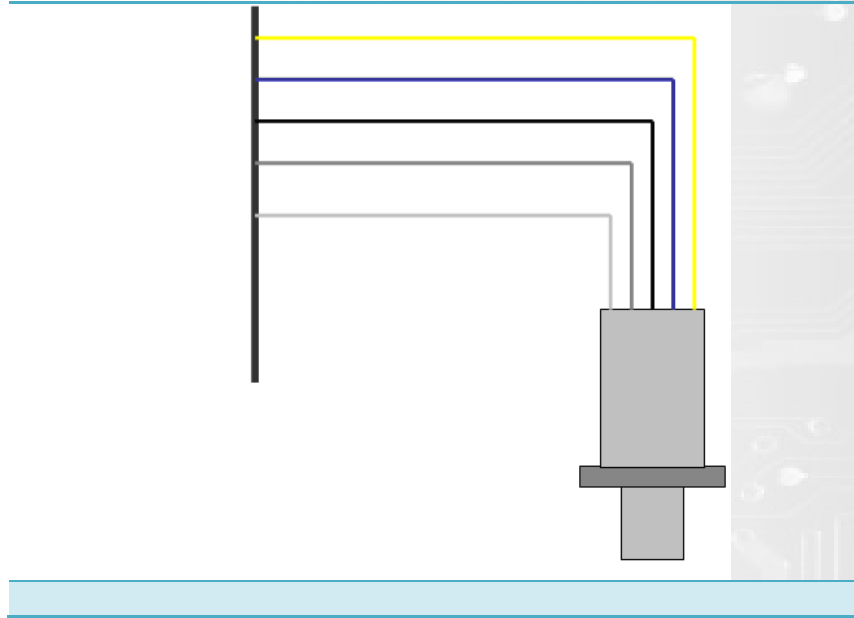


## WARNING


Due to all the different Wideband Lambda sensors requiring different hardware to work, a few solder bridges need to be changed to suit the sensor type.

**See Solder Bridge Section! Page 22**

Mounting recommendation

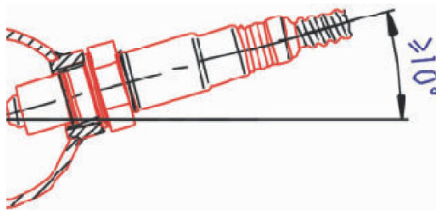

Recommended materials for the mating thread in the exhaust pipe  
\*: THexagon > 600°C or  
TGas > 930°C

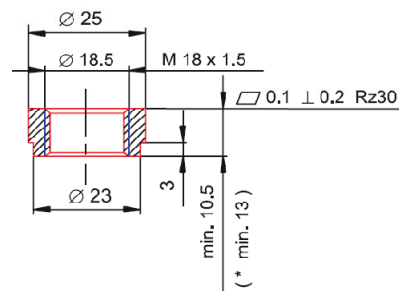



**NTK L1H1**

Lambda Sensor Input in Scal - Pin assignments needs to be Set to Lam1V, Lambda Heater Needs to be assigned to Slave1 Out9

<b>Lambda Pin Number</b>	<b>Colour</b>	<b>Name</b>	<b>S6Plus Pin</b>
1	Yellow	Heater	B7 or B13 or B19
2	Orange	Heater Drive	B12
6	Red	Nernst Cell Voltage	B8
7	White	Ion Pump Current	B9
8	Black	Signal Ground	B11

**NTK L2H2**

Lambda Sensor Input in Scal - Pin assignments needs to be Set to Lam1V, Lambda Heater Needs to be assigned to Slave1 Out9

<b>Lambda Pin Number</b>	<b>Colour</b>	<b>Name</b>	<b>S6Plus Pin</b>
1	Yellow	Heater	B7 or B13 or B19
2	Blue	Heater Drive	B12
6	Grey	Nernst Cell Voltage	B8
7	White	Ion Pump Current	B9
8	Black	Signal Ground	B11

Lambda Sensor Inputs in Scal - I/O Configuration - Pin assignments need to be Set to as Lambda1 - Slave1 AN08 and Lambda2 - Slave AN10.

The Lambda Heater control is done via Custom Outputs (Brake By Wire1 & 2) and needs to be assigned in the Pin Assignments as Lambda1 on Slave1 Out9 and Lambda 2 on Slave1 Out10.

The Sensor feeds back its cell temperature into the custom inputs LSUFeedback1 on Slave1 AN09 and LSUFeedback2 on Slave AN11 which are used part of the LSU Heater Control Strategy

Speak to Support team for Heater control calibration

### *Lambda 1*

<b>Lambda 1 - Pin Numbers</b>	<b>Colour</b>	<b>Name</b>	<b>S6Plus Pin</b>
1	Black	Nernst Cell Voltage	B8
2	Green	Cal Resistor	B10
3	Grey	Heater	B7 or B13 or B19
4	White	Heater Drive	B12
5	Yellow	Signal Ground	B11
6	Red	Ion Pump Current	B9

### *Lambda 2*

<b>Lambda 2 - Pin Numbers</b>	<b>Colour</b>	<b>Name</b>	<b>S6Plus Pin</b>
1	Black	Nernst Cell Voltage	B14
2	Green	Cal Resistor	B16
3	Grey	Heater	B7 or B13 or B19
4	White	Heater Drive	B18
5	Yellow	Signal Ground	B17
6	Red	Ion Pump Current	B15

Lambda Sensor Inputs in Scal - I/O Configuration - Pin assignments need to be Set to as Lambda1 - Slave1 AN08 and Lambda2 - Slave AN10.

The Lambda Heater control is done via Custom Outputs (Brake By Wire1 & 2) and needs to be assigned in the Pin Assignments as Lambda1 on Slave1 Out9 and Lambda 2 on Slave1 Out10.

The Sensor feeds back its cell temperature into the custom inputs LSUFeedback1 on Slave1 AN09 and LSUFeedback2 on Slave AN11 which are used part of the LSU Heater Control Strategy

Speak to Support team for Heater control calibration

### *Lambda 1*

<b>Lambda 1 - Pin Numbers</b>	<b>Colour</b>	<b>Name</b>	<b>S6Plus Pin</b>
1	Red	Ion Pump Current	B9
2	Yellow	Signal Ground	B11
3	White	Heater Drive	B12
4	Grey	Heater	B7 or B13 or B19
5		Cal Resistor	B10
6	Black	Nernst Cell Voltage	B8

### *Lambda 2*

<b>Lambda 2 - Pin Numbers</b>	<b>Colour</b>	<b>Name</b>	<b>S6Plus Pin</b>
1	Red	Ion Pump Current	B15
2	Yellow	Signal Ground	B17
3	White	Heater Drive	B18
4	Grey	Heater	B7 or B13 or B19
5		Cal Resistor	B16
6	Black	Nernst Cell Voltage	B14

Lambda Sensor Inputs in Scal - I/O Configuration - Pin assignments need to be Set to as Lambda1  
- Slave1 AN08 and Lambda2 - Slave AN10.

Lambda Heater Needs to be assigned to Slave1 Out9

### *Lambda 1*


Lambda Pin Number	Colour	Name	S6Plus Pin
1	White	Ion Pump Current	B9
2	Blue	Nernst Cell Voltage	B8
3	Black	Heater Drive	B12
4	Black	Heater	B7 or B13 or B19

### *Lambda 2*

Lambda Pin Number	Colour	Name	S6Plus Pin
1	White	Ion Pump Current	B15
2	Blue	Nernst Cell Voltage	B14
3	Black	Heater Drive	B18
4	Black	Heater	B7 or B13 or B19

### Knock Sensor

SyvecsS6GP has two Knock inputs for a piezoelectric Example Schematic



### Pin Schedule

Pin Number	Function	Notes
B4	Knock 1 Signal	
B5	Knock 2 Signal	
C1	Knock Grounds	


**NOTE:** Shield wires should be connected only at one end, common practice is to join shielding wires at the ECU end of the loom and connect them to a Power Ground wire.

### EGT/Thermocouple

Syvecs has 2 K-type thermocouple inputs.

EGT1 is Selected in Scal - Pin Assignments as Thermo1+, EGT2 is Selected as Slave1An7

### Example Schematic



### Pin Schedule

Pin Number	Function	Notes
C27	THER+	Green wire (K-type)
C26	THER-	White wire (K-type)

## Driven/Output Connections

### Ignition

The ignition channels are logic level outputs designed to control ignition coils via an additional igniter (Power transistor). These can be modified in hardware to drive coils direct, See Solder Bridge Section.

These as standard output a 5V Signal but can be raised to 12v with a Jumper change on board. Speak to Syvecs more about this directly if required.

### Pin Schedule

Pin Number	Function	Notes
A26	IGN1	Logic Level (5V) output
A27	IGN2	Logic Level (5V) output
A28	IGN3	Logic Level (5V) output
A29	IGN4	Logic Level (5V) output
A30	IGN5	Logic Level (5V) output
A31	IGN6	Logic Level (5V) output

**NOTE:** Do not connect IGN pins directly to a coil; the low coil resistance will draw a current that will damage the ECU.

### Fuel Outputs

The Injection channels are only able to drive high impedance injectors. The use of Low Impedance injectors with the S6 requires a Ballast pack/resistor pack. For more information on this e-mail [support@syvecs.co.uk](mailto:support@syvecs.co.uk)

Fuel Outputs also have full pulse width modulation available. These outputs can be used to drive up to 10A Peak / 5A Continuous and can only pull to ground.

### Pin Schedule

Pin Number	Function	Notes
A10	Fuel1	Injector Output or PWM
A11	Fuel2	Injector Output or PWM
A12	Fuel3	Injector Output or PWM
A13	Fuel4	Injector Output or PWM
A14	Fuel5	Injector Output or PWM
A15	Fuel6	Injector Output or PWM
A16	Fuel7	Injector Output or PWM
A17	Fuel8	Injector Output or PWM
A18	Fuel9	Injector Output or PWM
A19	Fuel10	Injector Output or PWM
A20	Fuel11	Injector Output or PWM
A21	Fuel12	Injector Output or PWM
A22	Fuel13	Injector Output or PWM
A23	Fuel14	Injector Output or PWM
A24	Fuel15	Injector Output or PWM
A25	Fuel16	Injector Output or PWM

### Half Bridge Outputs

An **H bridge** is an electronic circuit that enables a voltage to be applied across a load in either direction. These circuits are often used to drive Electronic Throttle bodies applications to allow DC motors to run forwards and backwards.

Half Bridge Outputs also have full pulse width modulation available and can be driven to 12v or Ground. These outputs can be used to drive up to 10A Peak / 5A Continuous.

#### Pin Schedule

Pin Number	Function	Notes
A2	H-Bridge1	Can be driven to 12v or Ground
A3	H-Bridge2	Can be driven to 12v or Ground
A4	H-Bridge3	Can be driven to 12v or Ground
A5	H-Bridge4	Can be driven to 12v or Ground
A6	H-Bridge5	Can be driven to 12v or Ground
A7	H-Bridge6	Can be driven to 12v or Ground
A8	H-Bridge7	Can be driven to 12v or Ground
A9	H-Bridge8	Can be driven to 12v or Ground

### Main Relay Control

The S6Plus has a Main Relay control circuit which takes a 12v ignition switched feed and then turns on a Main relay output pin (Pulls to Ground) to power the electronics on some vehicles.

In order for this to work a constant 12v feed is required to the S6Plus so it can monitor the state of the Main relay.

#### Pin Schedule

Pin Number	Function	Notes
A1	Main Relay Output	Pulls to Ground when Circuit active
B6	IVBAT	Constant 12v Supply pin
C28	Main Relay Input	Activates Main relay control when 12v is sent to this Pin

## S6GP+ Solder Bridge settings

The Syvecs S6Plus is built to cater for many applications, with this in mind some of the advanced hardware can only be activated via Solder Joins/Solder Blobs. The use of conventional Jumpers inside an ecu designed to cater with the harshest environments is not wise where vibrations can cause loose connections. We use a Solder Bridges which is designed to take that out of the question.

The Solder Bridges on the S6Plus are either on a 2 position pad or 3 position, and easily found on the bottom board of the Ecu. They are easy to access by removing the front panel of the Ecu followed by the bottom panel shown below.




By taking a small soldering iron and placing a small amount of solder on each pad and swiping the solder iron over the pads you can easily join pads to gain a connection.

The Default Setting which a Generic Board comes with are shown Below - Designed for use with Twin LSU4.9 Bosch Lambda Sensors as default

**IMPORTANT!! - Some of the Default Solder Bridge Settings are done via a PCB Track in between, Check carefully if adjusting Default settings that a track is not still in place, if so it needs cutting with a small blade to remove. An Example of this is on SB41 and SB42 that are set with a Track as Default to 1-2 so will need the track cutting to set on 2-3**



Default Setting



#### Driver Fly-Back Settings

SB27	PWM5	Fly-Back Diode
SB29	PWM6	Fly-Back Diode
SB32	PWM7	Fly-Back Diode
SB35	PWM8	Fly-Back Diode

#### Knock Setup


	S6 Single	S6 Dual
SB15	Off	1-2
SB44	1-2	2-3
SB68	Off	ON

#### RS232 Pin Selection

	RS232	Slave-Can
SB41	1-2	2-3
SB42	1-2	2-3

#### Driver Pull-Up Settings

SB20	PWM1	12V PullUp (470 Ohm)
SB23	PWM2	12V PullUp (470 Ohm)
SB24	PWM3	5V PullUp (470 Ohm)
SB26	PWM4	5V PullUp (470 Ohm)

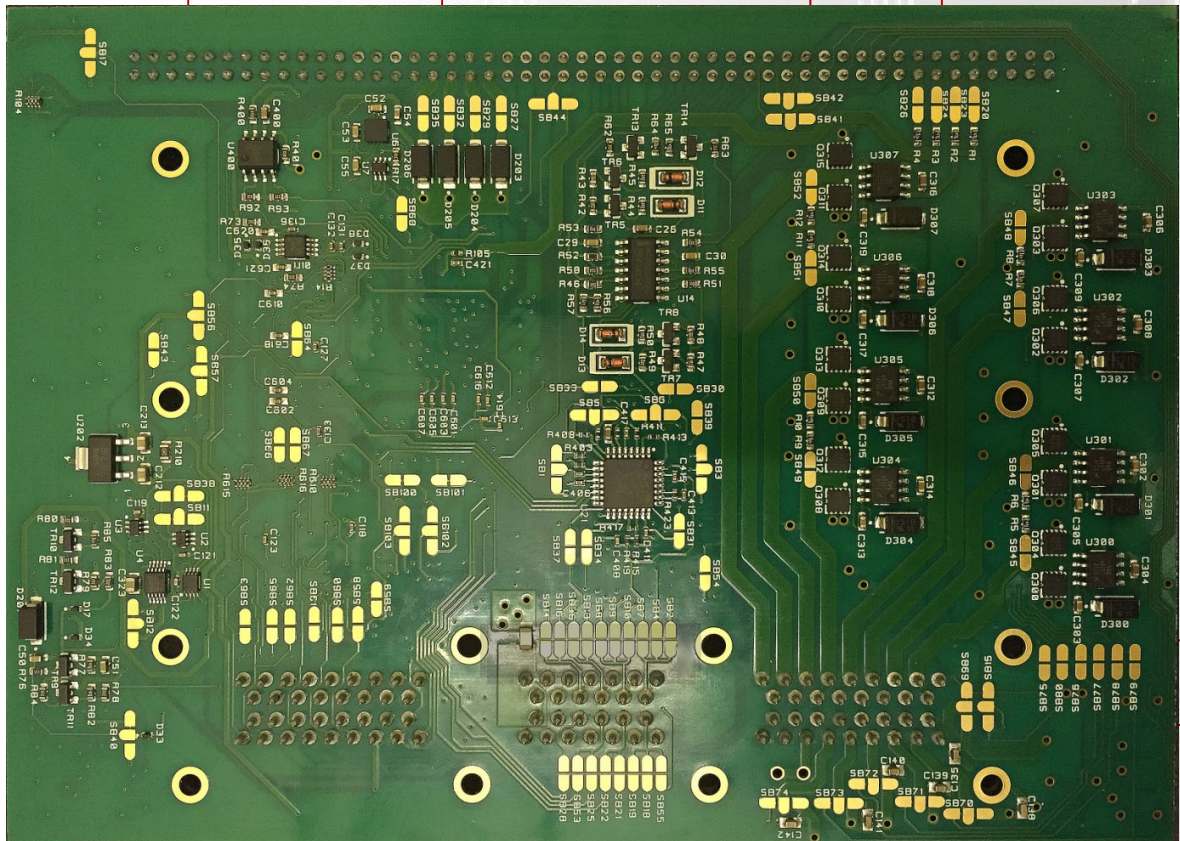

#### CAN Termination

	1200hm
SB100	ON-OFF
SB101	ON-OFF

#### CAN Selection:

	Internal	Vehicle
SB102	1-2	2-3
SB103	1-2	2-3

#### Lambda Settings:

	NTK-1	DENSO-1	DENSO-2	LSU4.2-1	LSU4.2-2	LSU4.9-1	LSU4.9-2
SB1				2-3		1-2	
SB2	ON						
SB3					2-3		1-2
SB4		ON					
SB5				2-3		1-2	
SB6					2-3		1-2
SB7				ON		ON	
SB8	ON						
SB9		ON					
SB10				ON		ON	
SB13				ON		ON	
SB14	ON						
SB16				ON		ON	
SB18			ON				
SB19			ON			ON	ON
SB21			ON				
SB22					ON	ON	ON
SB25					ON	ON	ON
SB28					ON	ON	ON
SB30		ON					
SB31				ON		ON	
SB34					ON		ON
SB33			ON				
SB36	ON						
SB37				ON		ON	
SB39					ON		ON

#### Ignition Driver Selection:

	PAD	TTL	IGBT
IGN1	SB75	Off	ON
IGN2	SB76	Off	ON
IGN3	SB77	Off	ON
IGN4	SB78	Off	ON
IGN5	SB79	Off	ON
IGN6	SB80	Off	ON

#### Ignition Driver Selection 2:

	PAD	TTL	IGBT
IGN1	SB69	1-2	2-3 * Requires Track to be Cut between 1-2
IGN2	SB70	1-2	2-3 * Requires Track to be Cut between 1-2
IGN3	SB71	1-2	2-3 * Requires Track to be Cut between 1-2
IGN4	SB72	1-2	2-3 * Requires Track to be Cut between 1-2
IGN5	SB73	1-2	2-3 * Requires Track to be Cut between 1-2
IGN6	SB74	1-2	2-3 * Requires Track to be Cut between 1-2